

Widget API Integration

CHANGELOG

Version	Date	Changes
v1.0	2026-09-09	Initial release.

WIDGET API INTEGRATION

Widget API Integration is designed for partners who want to manage the full user and card lifecycle through the Sparados API, while displaying card details to end users through the Sparados Card Widget instead of building their own card display and handling PAN / CVV directly.

In this model, the partner does not use Sparados hosted mobile or web applications, and does not receive or process raw PAN / CVV. Instead, the partner manages the end-user experience on its own side, communicates with Sparados APIs directly for user, card, balance and limit management, and embeds the Sparados Card Widget to show card details, balance and transaction history, and Add to Apple Wallet / Add to Google Wallet buttons.

Widget API Integration allows partners to:

- create users via API
- create cards via API
- manage card lifecycle
- display card data to end users through the Sparados Card Widget, without receiving PAN / CVV on the partner backend
- retrieve transactions and receive transaction notifications

This integration model gives the partner control over the user and card management flow, while keeping PCI DSS scope minimal, since sensitive card data is never received, processed, or stored by the partner.

Before using Widget API Integration, the partner must complete onboarding with Sparados, sign the cooperation agreement, and configure Mutual TLS authentication for the selected environment.

API Endpoints

API	Integration	BETA	PROD
Card, User, Card Data, 3DS and X-Pay Notifications API (swagger)	Widget	https://sp-api.secure-verestro.dev	https://sp-api.secure-verestro.com

API	Integration	BETA	PROD
Transaction API (swagger)	Widget	https://services.upaidtest.pl/thc	https://services.upaid.pl/thc

1. SERVER-TO-SERVER SECURITY

Communication between the partner and Sparados is secured using TLS certificates. The authentication method depends on the communication direction.

Partner → Sparados APIs

All requests sent by the partner to Sparados APIs require Mutual TLS (mTLS). The partner must configure the client certificate provided during onboarding. The same client certificate can be used across all mTLS-protected APIs unless agreed otherwise.

Instructions for generating and configuring the client certificate are available in the Connecting Server-to-Server section.

Sparados → Partner Webhooks

Webhook notifications, including Transaction API, 3DS OTP and Wallet notifications, are delivered over HTTPS. During the TLS handshake, Sparados presents its TLS server certificate. The partner system should validate the certificate before accepting the connection.

CA Certificates:

- BETA – ca_beta.crt
- PROD – ca_prod.crt

These CA certificates should be used to verify the TLS server certificate presented by Sparados during webhook delivery.

2. HOW WIDGET API INTEGRATION WORKS

In the Widget API model, the partner creates the end user and card directly through API, exactly as in Full API Integration. The process starts with creating a user using:

POST /secure/users/

The partner must provide the required user details, including email, phone number, first name, last name, date of birth, and nationality. After the user is created, Sparados returns id, which should be stored as userId.

The partner then creates a card for this user using:

POST /secure/cards/

The partner provides the returned `userId` in the card creation request body, together with the `balanceId` of the balance from which the card should be funded and basic card details such as description and visual identifier.

Once the card has been created successfully, Sparados returns `cardId`.

If additional limits need to be assigned to the card, they should be added only after the card has been created, using:

`POST /secure/cards/{cardId}/limits`

To show the card to the end user, instead of calling a card data retrieval endpoint directly, the partner requests a widget session token for that user and embeds the Sparados Card Widget. See section 9, WIDGET INTEGRATION, for details.

3. VALUES USED IN SPARADOS CARDS API

Detailed Swagger documentation is available at the end of this document.

This section describes common value formats used across Sparados Cards API. These rules apply when creating cards, defining card limits, setting validity periods, and managing card-related operations.

Date format

Sparados APIs use the ISO 8601 date and time format. The expected format is:

YYYY-MM-DD

Example:

2023-05-22

Minor values

All numeric amount values used in Sparados Cards API are provided in minor units. For example, to assign a card with a limit of 100.50 EUR, send:

10050

This applies to values such as:

- card budget
- additional limits
- budget increases
- budget decreases

Currency

Cards are created in the currency of the linked balance. The currency does not need to be provided separately when creating a card, because it is inherited from the selected linked balance. Each balance can have only one currency. Transactions may still be performed in other currencies, depending on the card configuration and transaction rules.

4. USER MANAGEMENT

In Widget API Integration, the partner manages end users directly through API. The user must be created before a card can be assigned to that user.

User API Methods

Method	Endpoint	Description
POST	/secure/users/	Creates a new end user.
GET	/secure/users/	Retrieves the list of users.
GET	/secure/users/{userId}	Retrieves details of a specific user.
PATCH	/secure/users/{userId}	Updates selected user details.
DELETE	/secure/users/{userId}	Deletes or deactivates the user, depending on the agreed configuration.

GET USERS

To retrieve the list of users created for the partner, use:

GET /secure/users/

This endpoint returns users available under the partner configuration. The returned user id should be stored as `userId` and used when creating or managing cards assigned to this user.

Example response:

```
[
  {
    "id": 123456,
    "email": "john.smith@example.com",
    "phoneNumber": "48123456789",
    "firstName": "John",
    "lastName": "Smith"
  }
]
```

CREATE USER

POST /secure/users/

Required fields:

Field	Type	Description
email	string	End user's email address.
phoneNumber	string	End user's phone number.
firstName	string	End user's first name.
lastName	string	End user's last name.
dateOfBirth	string	End user's date of birth. Recommended format: YYYY-MM-DD.
nationality	string	End user's nationality. Recommended ISO country code, for example PL.

Example request:

```
{
  "email": "john.smith@example.com",
  "phoneNumber": "48123456789",
  "firstName": "John",
  "lastName": "Smith",
  "dateOfBirth": "1990-01-01",
  "nationality": "PL"
}
```

Example response:

```
{
  "id": 123456
}
```

The returned id should be stored by the partner as `userId` and used when creating a card through POST /secure/cards/.

5. CREATE CARD

To issue a new virtual card for an existing user, use:

POST /secure/cards/

This endpoint issues a new virtual card linked to the selected balance and assigns it to the specified user.

The user must be created first through POST `/secure/users/`. After the user is created, Sparados returns `id`, which should be used as `userId` in the card creation request body.

The card is created directly using the selected `balanceId` and the assigned `userId`. The partner can obtain the available `balanceId` values by calling GET `/secure/balances/`.

The currency of the card depends on the selected `balanceId`. For example, if the card is linked to a EUR balance, the card currency will be EUR. If the card is linked to a PLN balance, the card currency will be PLN.

The `budgetMinor` field is optional. If it is not provided, the user can spend up to the amount available on the linked balance. If `budgetMinor` is provided, it defines the spending limit assigned to the card. A transaction is approved only if both the linked balance and the card budget are sufficient.

The `visualId` is provided by Sparados when a new card visual is created for the client. If it is not provided, the default card visual is used. Providing the correct `visualId` ensures that the card is displayed correctly in Apple Wallet and Google Wallet.

The `description` field is optional. It may be displayed inside the Sparados Card Widget, but the partner may also use this field to store its own card description or reference.

The response from POST `/secure/cards/` may take approximately 1–2 seconds, because Sparados creates the card, assigns it to the user, and configures the card balance before returning the response.

Once the response is returned, the card is already created and ready to use. Sparados returns the created card data, including `cardId`. The partner should store this value, as it is required for later card management and adding additional limits to the card.

Request body example:

```
{
  "balanceId": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "userId": 0,
  "budgetMinor": 0,
  "description": "string",
  "visualId": 0,
  "endDate": "2031-07-08"
}
```

Request body fields:

Field	Type	Description
balanceId*	string, uuid	UUID of the balance the card will be funded from. The partner can obtain this value by calling GET /secure/balances/. The card currency depends on the selected balance.
userId*	integer	ID of the user the card will be assigned to. This value is returned by POST /secure/users/.
budgetMinor	integer	Optional spending limit assigned to the card, expressed in minor currency units, for example 10000 = 100.00 PLN. If this field is not provided, the card may spend up to the amount available on the linked balance. If provided, both the linked balance and the card budget must be sufficient for the transaction to be approved.
description	string	Optional card description. It may be displayed inside the Sparados Card Widget and may also be used by the partner to store its own card description or reference.
visualId	integer	Card visual identifier provided by Sparados when a new card visual is created for the client. If not provided, the default card visual will be used. This value is required for correct card display in Apple Wallet and Google Wallet.
endDate	YYYY-MM-DD	Optional card expiry date in YYYY-MM-DD format (Europe/Warsaw timezone). The date cannot be later than the default card validity of 5 years from the card creation date. If omitted, the card expires after 5 years. The card is automatically deleted shortly before midnight (Europe/Warsaw time) on the specified date.

Additional properties are not processed by the API.

Example response:

```
{
  "id": 354
}
```

GET CARD DETAILS

To retrieve information about an existing card, use:

GET /secure/cards/{id}

This endpoint returns non-sensitive card information together with the current card status, assigned user, linked payment balance, budget configuration and available spending amount. Sensitive card data such as the full PAN and CVV is not returned by this endpoint. In the Widget API model, full card data is shown to the end user only through the Sparados Card Widget, see section 9.

Example response:

```
{
  "id": 12,
  "userId": 35,
  "balanceId": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "visualId": 5,
  "pan": "5414*****2598",
  "expiryDate": "05/31",
  "endDate": "2031-05-31",
  "description": "Marketing Team",
  "status": "ACTIVE",
  "budgetMinor": 100000,
  "balanceMinor": 85000
}
```

Response fields

Field	Type	Description
id	integer	Unique identifier of the card.
userId	integer	Identifier of the user assigned to the card.
balanceId	string (UUID)	Identifier of the payment balance linked to the card.
visualId	integer	Card visual identifier.
pan	string	Masked Primary Account Number (PAN) displayed for card identification.
expiryDate	string	Card expiration date displayed on the card (MM/YY).

Field	Type	Description
endDate	string	Date when the card expires and becomes inactive.
description	string	Optional card description provided during card creation.
status	string	Current card status (for example: ACTIVE, BLOCKED, EXPIRED).
budgetMinor	integer	Total spending budget assigned to the card, expressed in minor currency units.
balanceMinor	integer	Current amount still available for spending from the assigned card budget, expressed in minor currency units.

Note: budgetMinor represents the total spending limit assigned to the card, while balanceMinor represents the remaining amount available for spending. These values are independent from the payment account balance returned by GET /secure/balances/{balanceId}.

CARDS LIST

GET /secure/cards/

Retrieve a list of cards associated with your corporation, including their balance, budget and status. Supports filtering, sorting and cursor-based pagination.

Query parameters

Field	Type	Description
id	integer	Filter by card ID
lastFourDigits	string	Filter by the last four digits of the card
userEmail	string	Filter by the assigned user's email
userId	integer	Filter by assigned user ID
balanceId	string (uuid)	Filter by funding balance ID
createdAtFrom	string	Filter by creation date, lower bound
createdAtTo	string	Filter by creation date, upper bound
status	string	Filter by card status: active, locked
orderBy	string	Sorting field: createdAt, id, userEmail, balanceMinor, budgetMinor, endDate. Default createdAt
orderDirection	string	Sorting direction: asc, desc. Default desc

Field	Type	Description
cursor	string	Opaque cursor from a previous response's nextCursor
limit	integer	Max results per page, up to 1000. Default 100

Response fields

Field	Type	Description
data	array	List of card objects
data[].id	number	Card ID
data[].userId	number	ID of the assigned user
data[].userEmail	string, nullable	Email of the assigned user
data[].balanceId	string (uuid), nullable	ID of the funding balance
data[].currency	string, nullable	ISO 4217 currency of the funding balance
data[].visualId	integer, nullable	Card design template identifier
data[].lastFourDigits	string, nullable	Last four digits of the card
data[].budgetMinor	number, nullable	Spend limit in minor currency units
data[].balanceMinor	number, nullable	Remaining spendable balance in minor currency units
data[].endDate	string, nullable	Custom expiry date, if set
data[].expiryDate	string	Default card expiry date, YYYY-MM-DD
data[].createdAt	string (date-time)	Card creation timestamp
data[].lockedAt	string (date-time), nullable	Timestamp the card was locked, if applicable
data[].status	string	Card status: active, locked
nextCursor	string, nullable	Pass as cursor to fetch the next page, or null if none

Example response

```
{
  "data": [
    {
      "id": 1234,
      "userId": 88,
      "userEmail": "jane.doe@example.com",
```

```
    "balanceId": "67716ba1-081b-4919-8aae-9fdbee10be23",
    "currency": "EUR",
    "visualId": 1,
    "lastFourDigits": "1234",
    "budgetMinor": 50000,
    "balanceMinor": 32000,
    "endDate": null,
    "expiryDate": "2031-05-31",
    "createdAt": "2026-08-01T10:15:00Z",
    "lockedAt": null,
    "status": "active"
  }
],
"nextCursor": null
}
```

CARD BUDGET

A card budget defines how much can be spent using a specific card. It is independent from the linked balance, which represents the actual funds available on the payment account.

Field	Meaning
budgetMinor	Spending limit assigned to the card. This value defines the maximum amount that can be spent using the card.
balanceMinor	Available amount remaining from the card budget. This value decreases after successful transactions.

Example:

```
Initial budget:
budgetMinor = 100000 (1,000.00 EUR)
balanceMinor = 100000 (1,000.00 EUR)

After spending 250.00 EUR:
budgetMinor = 100000
balanceMinor = 75000
```

Card budget and additional card limits are independent mechanisms. The card budget defines how much can be spent by the card, while additional card limits define how, where, and how often the card may be used, for example ATM withdrawals, e-commerce transactions, MCC restrictions, merchant restrictions, or transaction count limits. Both validations are performed during transaction authorization.

ADJUSTING CARD BUDGET

To adjust the card budget, use:

PATCH /secure/cards/{id}/budget

This endpoint changes the card budget by the value provided in adjustmentAmountMinor. A positive value, or a value without the + sign, increases the card budget. A negative value decreases the card budget.

Request body fields:

Field	Type	Description
adjustmentAmountMinor*	integer	Amount by which the card budget should be adjusted. The value is expressed in minor currency units. Positive values increase the card budget. Negative values decrease the card budget.

Examples:

```
{
  "adjustmentAmountMinor": 10000
}
```

This increases the card budget by 100.00 EUR.

```
{
  "adjustmentAmountMinor": -5000
}
```

This decreases the card budget by 50.00 EUR.

This endpoint does not add funds to the linked balance and does not change the payment account balance. The card must already have a budget configured. Otherwise, the API returns HTTP 409 Conflict.

RESETTING CARD BUDGET

To reset the card budget, use:

POST /secure/cards/{id}/budget/reset

This endpoint recreates the existing budget and resets the spent amount, making the full budget available again.

Request body fields:

Field	Type	Description
newBudgetMinor	integer	Optional. If provided, the budget is recreated using the new value and the full amount becomes available again. If omitted, the existing budget value is reused and the available amount is reset to the current budget.

The card must already have a budget configured. Otherwise, the API returns HTTP 409 Conflict.

6. CHECKING ACCOUNT BALANCE

To check the balance of the payment account connected with issued cards, use:

GET /secure/balances/{balanceId}

This method returns the current balance of the payment account linked to issued cards. This is the actual account balance, not the card budget.

The balanceId required for this method is provided by Sparados after the payment account is created for the partner.

7. ADDITIONAL CARD SPENDING LIMITS

After the card has been created, additional card limits can be assigned using:

POST /secure/cards/{id}/limits

This endpoint adds one limit to an existing card. Additional limits should be added only after the card has been successfully created and is ready to use. Each POST /secure/cards/{id}/limits request adds a single additional limit. Editing and deleting limits are also performed one by one. Only the GET method returns a list of limits assigned to the card.

All amountMinor values are provided in minor currency units, for example 10000 = 100.00 PLN. Amount-based limits are cumulative, not per-transaction limits. Each successful transaction reduces the remaining amount available until the applicable limit period resets or the limit is removed.

REQUEST BODY FIELDS

Field	Type	Description
type	string	Type of the card limit.
amountMinor	integer	Amount limit in minor currency units, for example 10000 = 100.00 PLN. Used for amount-based limits.

Field	Type	Description
maxAttempts	integer	Maximum number of transactions allowed within the selected period. Used for quantity-based limits.
period	string	Limit period. Available values: DAILY, WEEKLY, MONTHLY.
mcclList	array of strings	List of merchant category codes used for MCC whitelist or blacklist limits.
merchantIdList	array of strings	List of merchant IDs used for merchant whitelist or blacklist limits.

SUPPORTED LIMIT TYPES

TRX_ALL — cap on all transactions combined.

```
{
  "type": "TRX_ALL",
  "amountMinor": 50000,
  "maxAttempts": 10,
  "period": "MONTHLY"
}
```

TRX_E_COM — cap on e-commerce transactions only.

```
{
  "type": "TRX_E_COM",
  "amountMinor": 10000,
  "maxAttempts": 5,
  "period": "DAILY"
}
```

TRX_ATM — cap on ATM withdrawals.

```
{
  "type": "TRX_ATM",
  "amountMinor": 30000,
  "maxAttempts": 2,
  "period": "WEEKLY"
}
```

FOREIGN_AMOUNT — cap on the total amount spent in a foreign currency.

```
{
  "type": "FOREIGN_AMOUNT",
  "amountMinor": 20000,
  "period": "MONTHLY"
}
```

FOREIGN_QUANTITY — cap on the number of foreign-currency transactions.

```
{
  "type": "FOREIGN_QUANTITY",
  "maxAttempts": 3,
  "period": "DAILY"
}
```

QUANTITY — cap on total transaction count regardless of transaction type.

```
{
  "type": "QUANTITY",
  "maxAttempts": 100,
  "period": "DAILY"
}
```

AMOUNT_PLN — cap on PLN-denominated spend.

```
{
  "type": "AMOUNT_PLN",
  "amountMinor": 50000,
  "period": "WEEKLY"
}
```

AMOUNT_EUR — cap on EUR-denominated spend.

```
{
  "type": "AMOUNT_EUR",
  "amountMinor": 20000,
  "period": "MONTHLY"
}
```

MCC_BLACKLIST — blocks transactions at terminals with the given merchant category codes.

```
{
  "type": "MCC_BLACKLIST",
  "mccList": ["5812", "5813"]
}
```

MCC_WHITELIST — allows transactions only at terminals with the given merchant category codes.

```
{
  "type": "MCC_WHITELIST",
  "mccList": ["5812"]
}
```

MERCHANT_ID_BLACKLIST — blocks transactions at specific merchants.

```
{
  "type": "MERCHANT_ID_BLACKLIST",
  "merchantIdList": ["9AF3C2B1D4E5"]
}
```

MERCHANT_ID_WHITELIST — allows transactions only at specific merchants.

```
{
  "type": "MERCHANT_ID_WHITELIST",
  "merchantIdList": ["9AF3C2B1D4E5"]
}
```

RESPONSE

After the limit has been created successfully, the API returns 201 Created with the created limit details.

Example response:

```
{
  "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "type": "TRX_ALL",
  "amountMinor": 0,
  "maxAttempts": 0,
  "period": "DAILY",
  "mccList": ["string"],
  "merchantIdList": ["string"]
}
```

```
}
```

The returned id is the limit ID. The partner should store this value if the limit may need to be edited or removed later. The same limit ID can also be retrieved using the GET method that returns the list of limits assigned to the card.

MULTIPLE AND OVERLAPPING LIMITS

The API allows multiple limits of the same type, including limits with the same period. All applicable limits are checked for each transaction, so the most restrictive limit is effectively enforced. For example, if a card has two weekly TRX_ATM limits of 100 EUR and 50 EUR, the effective weekly ATM limit is 50 EUR.

The API validates conflicts between whitelists and blacklists because these rules are mutually exclusive. MCC_WHITELIST and MCC_BLACKLIST cannot be active at the same time, and the same rule applies to MERCHANT_ID_WHITELIST and MERCHANT_ID_BLACKLIST.

GETTING, EDITING AND DELETING CARD LIMITS

If the partner wants to edit an existing limit, the partner must use the limit ID in the PATCH method. This limit ID is returned when the limit is created using POST /secure/cards/{id}/limits. It can also be retrieved by calling the GET method that returns the list of limits assigned to the card. To change an existing limit, the partner should either edit the existing limit using its limit ID or remove the existing limit first and then add a new one.

The difference is how accumulated usage counters are handled. If the existing limit is edited, the current usage counter is preserved. If the limit is removed and a new limit is created, the accumulated usage counter associated with the removed limit is not carried over to the new limit.

For example, if the card has a TRX_ATM limit of 100 EUR and the user has already spent 20 EUR, then increasing the existing limit to 200 EUR means the user will still have 180 EUR available under this limit. However, if the partner removes the existing TRX_ATM limit and then adds a new TRX_ATM limit of 200 EUR, the accumulated usage counter is reset and the user will have the full 200 EUR available under the new limit.

Recommended approach: if the partner wants to change the limit value while preserving accumulated usage, the existing limit should be edited using its limit ID. If the partner wants to reset accumulated usage, the existing limit should be removed and a new limit should be created. Although the API allows multiple limits of the same type, removing or editing the existing limit before adding its replacement is recommended to avoid overlapping limits and unclear card configuration.

8. INTERNAL ACCOUNT TRANSFER

The transfer is performed directly between two balances identified by their balanceld values.

To transfer funds between payment accounts, use:

POST /secure/transfers/internal

Both balances must belong to the same corporation and be maintained in the same currency. Transfers between different corporations or currencies are not supported.

Request body example:

```
{
  "senderBalanceId": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "receiverBalanceId": "7c9e6679-7425-40de-944b-e07fc1f90ae7",
  "amountMinor": 10000
}
```

Request body fields:

Field	Type	Description
senderBalanceId*	string, UUID	ID of the balance from which the funds will be transferred.
receiverBalanceId*	string, UUID	ID of the balance to which the funds will be transferred.
amountMinor*	integer	Transfer amount in minor currency units, for example 10000 = 100.00 EUR.

Response

If the transfer is completed successfully, the API returns the identifiers of the two transactions created as part of the internal transfer.

```
{
  "receiverTransactionId": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "senderTransactionId": "3fa85f64-5717-4562-b3fc-2c963f66afa6"
}
```

Field	Type	Description
receiverTransactionId	string, UUID	Identifier of the incoming transaction created on the receiver's balance. This transaction represents the credit to the destination balance.
senderTransactionId	string, UUID	Identifier of the outgoing transaction created on the sender's balance. This transaction represents the debit from the source balance.

The returned transaction identifiers can be used to retrieve transaction details using the transaction endpoints or for reconciliation and audit purposes. The source balance must contain sufficient funds to complete the transfer. Available balance values can be retrieved using GET `/secure/balances/`.

9. WIDGET INTEGRATION


The Sparados Card Widget is a hosted card interface you embed inside your own application. It lets you show your end users their card details together with Add to Apple Wallet and Add to Google Wallet buttons, without building this interface yourself and without ever handling sensitive card data (PAN, CVV) on your backend. Balance and transaction history can be enabled if you want them shown as well.

Your application stays responsible for onboarding and authenticating your own end users. Sparados stays responsible for securely rendering and protecting the card data shown inside the widget.

How it works

1. Your backend authenticates the end user in your own application, exactly as it does today.
2. Your backend requests a short-lived widget session token from Sparados for that specific user, using your server-to-server credentials (Mutual TLS, same as the rest of the Sparados API). Sparados issues the token based on the user information you send.
3. Your frontend loads the widget, passing it the session token.
4. The widget renders the user's card details and wallet buttons directly to the end user.
Your backend never sees or stores the underlying card data.

Sequence diagram

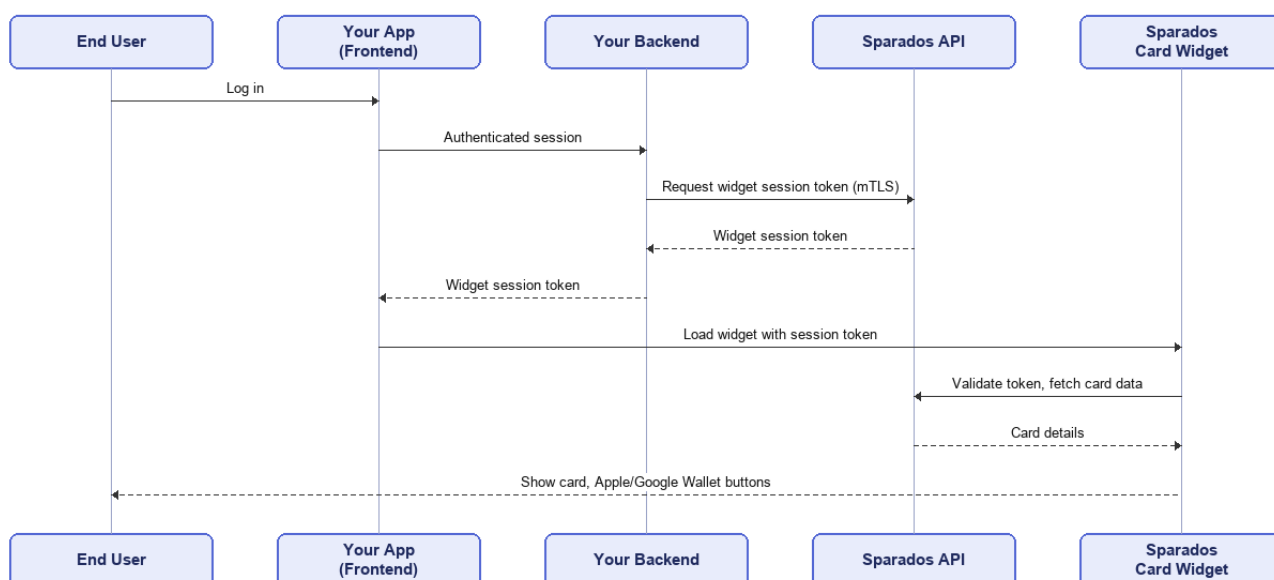

Embedding

Web

```
<iframe
  src="https://<widget-host>/widget?sessionToken=<TOKEN>"
  width="100%"
  height="100%"
  allow="clipboard-read; clipboard-write"
  sandbox="allow-scripts allow-same-origin allow-forms allow-popups">
</iframe>
```

Mobile

Load the same widget URL in a native WebView, with JavaScript, DOM storage and session storage enabled.

TO CONFIRM: <widget-host> and the exact token parameter name are placeholders, confirm the production and BETA widget domains before publishing.

Features shown to the end user

- Card details (masked or full PAN, CVV and expiry, depending on configuration)
- Add to Apple Wallet / Add to Google Wallet buttons
- Balance, if enabled for your corporation
- Transaction list and transaction details, if enabled for your corporation
- Card lock / unlock, if enabled for your corporation

Security

- Sensitive card data such as PAN and CVV is never exposed to your backend.
- The widget session token is short-lived and scoped to a single end user and session.
- You must not collect, proxy, log or store card data shown inside the widget.

Requirements

- Mutual TLS access to the Sparados API, same as Simple and Full API Integration.
- Users and cards created through the Sparados API, as described in sections 4 and 5 above.

10. SPARADOS TRANSACTION API

Sparados Transaction History API allows partners to retrieve transaction history and receive transaction notifications.

The API consists of two parts:

Type	Description
Inbound API	API methods called by the partner to retrieve transaction data from Sparados.
Outbound API	Webhook notifications sent by Sparados to the partner system when transaction events occur.

Transaction API documentation is available here: <https://developer.verestro.com/books/transaction-history-api/page/technical-documentation-thc-external-api>

Authentication

Authentication and certificate requirements are described in the Server-to-Server Security section. Inbound API requests require Mutual TLS (mTLS). Outbound webhook notifications are delivered over HTTPS using the Sparados TLS server certificate.

Backward Compatibility

Future API changes will be backward compatible. The following changes may be introduced without breaking compatibility:

- adding a new endpoint
- adding a new optional request parameter
- adding a new optional response field
- adding a new enum value
- relaxing validation rules for an existing parameter, for example making it optional

The partner system should ignore unknown fields and unknown enum values received in API responses.

Outbound Retry Strategy

If an outbound webhook call fails because of a timeout, connection issue, or HTTP 5xx response, Sparados will retry the call automatically.

Retry stage	Description
Initial retries	3 retries with up to 5 seconds between each attempt.
Extended retries	If the call still fails, Sparados performs 3 additional retries after 15 minutes, 30 minutes, and 2 hours.
Final result	If all retries fail, the webhook call is dismissed.

The partner endpoint should return a successful HTTP 2xx response after receiving and processing the notification. Webhook delivery should be treated as at-least-once, so the partner should process webhook notifications idempotently.

11. OTP AND WALLET NOTIFICATION WEBHOOKS

In Widget API Integration, Sparados can send OTP and wallet-related notifications to endpoints provided by the partner.

The partner must provide Sparados with the full webhook URLs that should be used for notification delivery.

Webhook notifications are delivered over HTTPS using the Sparados TLS server certificate. Authentication and certificate requirements are described in the Server-to-Server Security section.

The partner endpoint should return 204 No Content to confirm that the notification was received successfully.

3DS OTP Notification

This webhook is triggered when a 3DS OTP is generated for a card in your corporation.

Endpoint: POST {3ds_otp_notification_url}

The full endpoint URL is provided by the partner during integration setup.

Request Body

Field	Type	Description
balanceId	string	Balance ID related to the card.
currency	string	Transaction currency.
merchantName	string	Merchant name for the transaction.
otp	string	3DS one-time password generated for the transaction.
cardId	integer	Card ID.
userId	integer	User ID assigned to the card.
amountMinor	integer	Transaction amount in minor units.
cardLast4Digits	string	Last 4 digits of the card number.

Example Request Body

```
{
  "balanceId": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "currency": "EUR",
  "merchantName": "Example Merchant",
  "otp": "123456",
  "cardId": 123,
  "userId": 456,
```

```
"amountMinor": 1000,  
"cardLast4Digits": "2598"  
}
```

Expected Response: 204 No Content

Wallet Notifications

This webhook is triggered when a wallet notification event occurs for a card in your corporation. It is used for Apple Pay / Google Pay related events, including activation code delivery and token status updates.

Endpoint: POST {wallet_notifications_url}

The full endpoint URL is provided by the partner during integration setup.

Message Types

messageType	Description
ACTIVATION_CODE_DELIVERY	Wallet activation code should be delivered to the end user.
TOKEN_ACTIVATED	Wallet token has been activated.
CARD_REMOVED_BY_CUSTOMER	Card has been removed from the wallet by the customer.
CARD_REMOVED_BY_ISSUER	Card has been removed from the wallet by the issuer.

Request Body

Field	Type	Description
cardLast4Digits	string	Last 4 digits of the card number.
tokenRequestorType	string	Wallet provider / token requestor type.
messageType	string	Wallet notification type.
activationMethodType	string	Activation method type. Present only for ACTIVATION_CODE_DELIVERY.
activationMethodValue	string	Activation method value. Present only for ACTIVATION_CODE_DELIVERY.
activationCode	string	Wallet activation code. Present only for ACTIVATION_CODE_DELIVERY.
formFactor	string	Device or wallet form factor.
cardId	integer	Card ID.

Example Request Body

```
{
  "cardLast4Digits": "2598",
  "tokenRequestorType": "APPLE_PAY",
  "messageType": "ACTIVATION_CODE_DELIVERY",
  "activationMethodType": "SMS",
  "activationMethodValue": "48123456789",
  "activationCode": "123456",
  "formFactor": "PHONE",
  "cardId": 123
}
```

Expected Response: 204 No Content

Important: the fields `activationCode`, `activationMethodType`, and `activationMethodValue` are present only when `messageType` is `ACTIVATION_CODE_DELIVERY`.

12. API SWAGGER DOCUMENTATION

Detailed API documentation is available here:

API	Documentation link
Full API Swagger	https://sp-api.verestro.dev/docs?urls.primaryName=External
Cards API Swagger	https://sparados-bc-api.upaidtest.pl/api-secure.yaml
Transaction API Documentation	https://developer.verestro.com/books/transaction-history-api/page/technical-documentation-thc-external-api

Use the Swagger documentation as the source of detailed endpoint schemas, request parameters, response formats, and available enum values.

Revision #5

Created 8 September 2026 13:49:27 by Michał Stachera

Updated 9 September 2026 14:18:25 by Michał Stachera